

Adensoy



TWMND N-type Half-cell Monofacial Black Frame Module (54) 54HS425-445W




www.adensoyicare.com.tr



Learn More

DRAWINGS (Unit: mm)

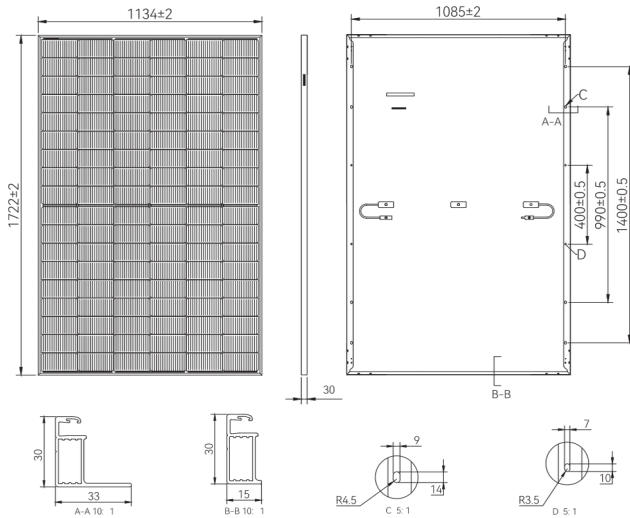

ELECTRICAL CHARACTERISTICS (STC)

Module Type: TWMND-54HSXXX					
Maximum Power: Pmax [W]	425	430	435	440	445
Open Circuit Voltage: Voc [V]	39.00	39.15	39.30	39.45	39.85
Short Circuit Current: Isc [A]	13.62	13.67	13.72	13.77	14.00
Voltage at Maximum Power: Vmp [V]	33.09	33.26	33.43	33.60	33.75
Current at Maximum Power: Imp [A]	12.85	12.93	13.01	13.10	13.19
Module Efficiency: η [%]	21.8	22.0	22.3	22.5	22.8

* STC: Irradiance 1000W/m², Cell Temperature 25°C, Air Mass1.5

ELECTRICAL CHARACTERISTICS (NMOT)

Maximum Power: Pmax [W]	320.0	324.0	327.8	331.8	335.3
Open Circuit Voltage: Voc [V]	37.04	37.19	37.33	37.47	37.85
Short Circuit Current: Isc [A]	10.96	11.02	11.06	11.10	11.29
Voltage at Maximum Power: Vmp [V]	30.81	30.98	31.14	31.30	31.44
Current at Maximum Power: Imp [A]	10.39	10.46	10.52	10.60	10.67

* NMOT: Irradiance 800W/m², Ambient Temperature 20°C, Air Mass1.5, Wind Speed 1m/s

TEMPERATURE PARAMETERS

Temperature Coefficient (Pmax)	-0.28%/°C
Temperature Coefficient (Voc)	-0.24%/°C
Temperature Coefficient (Isc)	+0.046%/°C
NMOT	45±2°C


MAXIMUM RATINGS

Operational Temperature	-40°C~+85°C
Maximum System Voltage	1500V DC
Maximum Series Fuse Rating	25A
Power Output Tolerance	0~+3%


MECHANICAL PARAMETERS

Cells	TNC (N Type Monocrystalline Cell)
Cell Orientation	108[6×18]
Dimension	1722±2×1134±2×30mm
Weight	20.5kg
Front Glass	3.2mm high transmittance, AR coated tempered glass
Backsheet	White
Frame	Anodized aluminum alloy black frame
Junction Box	IP68, 3 diodes
Output Cable	4.0mm ²
Cable Length	±1200mm, length can be customized
Wind/Snow Load	2400Pa/5400Pa
Packaging	36pcs per pallet, 936pcs per 40'HC

WARRANTY

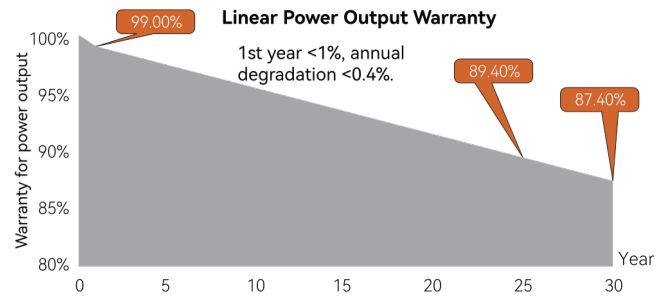

I-V CURVE

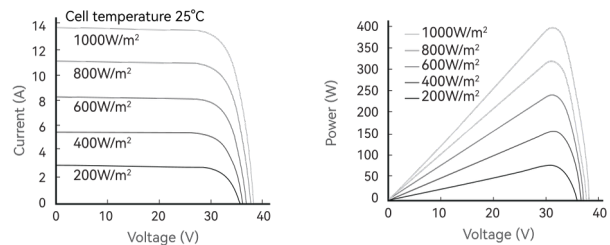

CERTIFICATIONS

Quality Management System and Product Certification

- ISO 9001: 2015/Quality management system
- ISO 14001: 2015/Environmental management system
- ISO 45001: 2018/Occupation health safety management system
- ISO 50001: 2018/Energy management system
- IEC 62941: 2019/Quality system for PV module manufacturing
- IEC 61215/61730, IEC 62804(PID), IEC 61701(Salt), IEC 62716 (Ammonia), IEC 60068-2-68(Sand)

